

Instruction Sheet

Rainbow Platform Swing 120177

Warning: Failure to properly install a Southpaw forged steel eyebolt (1/2" or 5/8") may result in serious injury or death. If you have any questions about the installation of the Southpaw forged steel eyebolt, please contact Southpaw Enterprises Customer Service at 1-800-228-1698.



Take time to familiarize yourself with the use and maintenance of this equipment before using. Please file this Instruction Sheet in an accessible location. The Instruction Sheet must be read and familiar to anyone who is using Southpaw Enterprises Equipment.

IMPORTANT: Please check equipment immediately for any damage that may have resulted during shipping. If any damage has occurred, please contact Southpaw Enterprises, Inc. immediately.

MATERIALS LIST:

- 1 - Rainbow Swing Frame with padded board
- 1 - Platform Cover
- 1 - Instruction Sheet
- 1 - Maintenance Checklist

PUTTING THE COVER / BUCKET ON THE SWING:

- Lift the swing by the top snap in order to determine the correct orientation of the swing.
- Place the frame, upside down, on the floor or on a table.
- Place the platform cover (flat, shown) or bucket cover (dimensional) inside the platform swing frame, with the Southpaw logo facing down.
- Bring the edge of the cover around the frame from the inside and fasten the two halves of the zipper (See fig. 1) **NOTE:** As pictured
- Once all the zippers have been zipped, you must secure the zipper tab in the hook-and-loop closure. First, while holding the zipper tab up, lay the "fuzzy", or loop, piece down against the zipper. (see fig.2). Next, lay the zipper tab on top of the loop fabric, and press the "scratchy", or hook fabric on top of the zipper tab (see fig. 3). This locks the zipper in place so that it cannot unzip. **Doing this step properly is critical for the safety of you clients.**

Fig. 1



Assembly Instructions

MINIMUM HEIGHT REQUIREMENT

See reverse for important safety and use instructions

AND SPACE

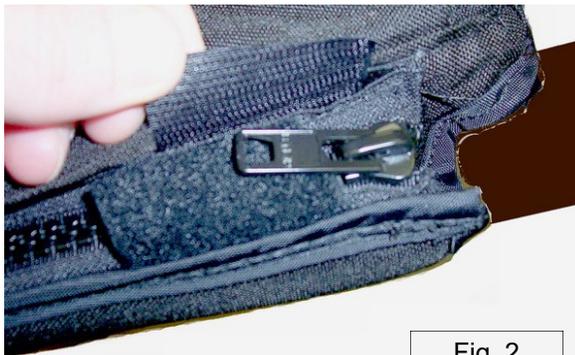


Fig. 2



Fig. 3

NEEDED

- Minimum height required is 8 ft.
- Caution must be used to keep a clear distance of 6 ft. from walls and other obstacles.

HEIGHT ADJUSTER AND SAFETY ROTATIONAL DEVICE NEEDED


- Use of the Southpaw 5000 Height Adjuster is recommended for ease of adjusting the height of your equipment.
- A Southpaw 2000 Safety Rotational Device must be used to prevent damage to your equipment.

WORKING LOAD: 200 lbs.


HANGING PROCEDURE

- Hang Platform Swing by attaching the Safety Snap that is on the top of the Platform Swing to your height adjustment system.

Like our regular Platform Swing, this swing can be adjusted for various degrees of challenge for any client.

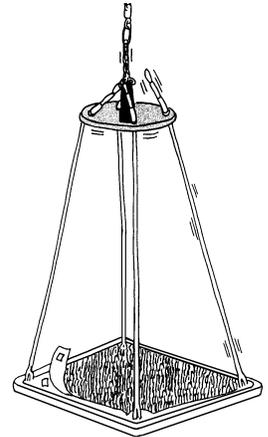

With four control lines connected to the main suspension line, the platform remains relatively stable.



Stability lines will unclip to give a total range of movement

MAINTENANCE CHECKLIST:

The following wear points should be checked on a monthly basis and recorded on the checklist enclosed.

- Check seams for rips or tears. If rips or tears are found, discontinue use immediately until repaired.
- Check for cracks or splinters in the wooden "Upper Works" of the swing. If found, discontinue use until repaired or replaced.
- Check all hardware pieces for wear. If found, call for replacement parts immediately.

CLEANING INSTRUCTIONS:

Check with your infectious disease department before using these procedures.

- Check for client allergies first.
- Cover is machine washable using cold water and mild detergent. DO NOT DRY - line dry only.

Safety Precautions - The safety of your clients is dependent on the appropriate choice of activity to match, yet challenge their physical abilities. Use appropriate spotting / safety techniques. In addition, the layout of your activity area, proper installation and maintenance of your equipment is critical. Southpaw equipment is not intended for recreational or outdoor use. Under no condition should this equipment be used without proper supervision.

This sheet is for example only. It is not meant to, in any way, replace local, county, state, or Federal standards. Be aware - it is your responsibility to find all pertinent safety information that pertains to your facility.

If you have any questions or comments, please call or write

Southpaw Enterprises, Inc.

P.O. Box 1047, Dayton, Ohio 45401-1047

Toll Free - (800) 228-1698

Please visit us at southpaw.com

© 2026 Southpaw Enterprises, Inc.