



**southpaw enterprises, inc.**<sup>®</sup>

Store these instructions along with the enclosed maintenance checklist in a safe place. You may also access them on our website.

# Instruction Sheet

## Ball Storage Rack 6 ft. 132000



Take time to familiarize yourself with the use and maintenance of this equipment before using. Please file this Instruction Sheet in an accessible location. The Instruction Sheet must be read and familiar to anyone who is using Southpaw Enterprises Equipment.


**IMPORTANT:** Please check equipment immediately for any damage that may have resulted during shipping. If any damage has occurred, please contact Southpaw Enterprises, Inc. immediately.

### MATERIALS LIST:

2 - End tubes with mounting bracket & elbow.	2 - 1/2-13 clamp nuts
1 - Front tube	1 - Instruction Sheet
2 - 1/2-13 x 1" hex head bolts	1 - Maintenance Checklist

**TOOLS NEEDED:** 3/4" wrench

**EASIEST TO ASSEMBLE WITH TWO PERSONS**

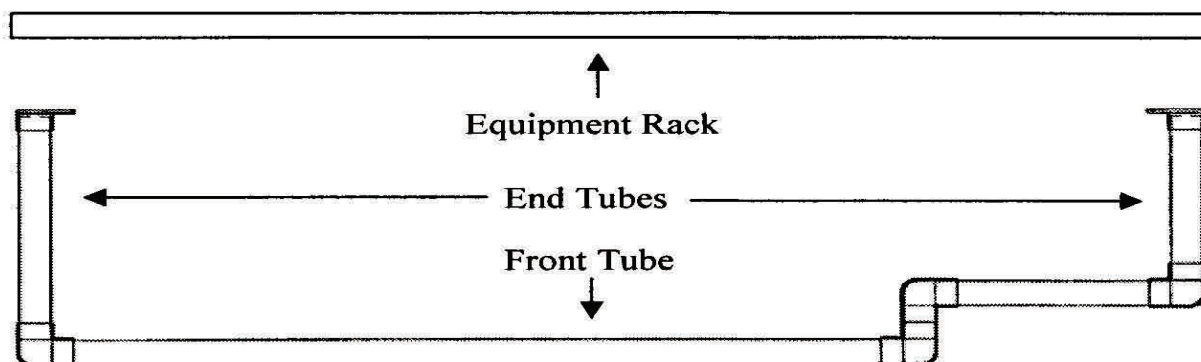

### TO ASSEMBLE:

- Assemble laying on a flat surface.
- Push one end of the front tube into the opening of the elbow on one of the end tubes. Make sure that the end of the straight piece goes all the way in until it hits the stop in the elbow.
- Lay the two assembled pieces on the flat surface so that when you put the other end tube on the opposite end of the front tube the two end tubes will be aligned with each other.
- With both end tubes laying on the flat surface, push the opposite end of the front tube into the opening of the elbow on the other end tube. It will help if someone holds one end of the front tube while the second end tube is being pushed onto the front tube. You may need to tap the elbow lightly to get it to go against the stop in the elbow.

### TO MOUNT TO EQUIPMENT RACK:

- Put a 1/2" x 1" bolt through the holes in the green mounting brackets from the front side of the bracket. One side of the clamp nut has a groove on each end with "teeth" in the grooves. Start the bolt into the clamp nut from this side. Start the bolts into the nuts just enough to keep the nuts on the bolts.
- With one person on each end of the ball rack, lift the rack into position against the equipment rack. Turn the clamp nuts horizontal so that they will go into the opening in the front of the equipment rack. Turn the bolt clockwise. The

clamp nut will turn and tighten the same way as the eye bolts in the equipment rack. Start the bolts in both ends of the rack. Using a 3/4" wrench, tighten both bolts securely.

**MAINTENANCE CHECKLIST:**

All of the following wear points should be checked on a monthly basis and recorded on the checklist enclosed.

- Check that bolts are tight. If loose bolts are found, tighten securely.
- Check for cracks in plastic tube. If cracks are found, discontinue use until repaired.

**CLEANING INSTRUCTIONS:**

- Check with your infectious disease department before using these procedures.
- Check for client allergies first.
- Wipe with a damp cloth using soap and water or disinfectant.

**Safety Precautions** - The safety of your clients is dependent on the appropriate choice of activity to match, yet challenge their physical abilities. Use appropriate spotting / safety techniques. In addition, the layout of your activity area, proper installation and maintenance of your equipment is critical. Southpaw equipment is not intended for recreational or outdoor use. Under no condition should this equipment be used without proper supervision.

**This sheet is for example only.** It is not meant to, in any way, replace local, county, state, or Federal standards. Be aware - it is your responsibility to find all pertinent safety information that pertains to your facility.



If you have any questions or comments, please call or write  
Southpaw Enterprises, Inc.  
P.O. Box 1047, Dayton, Ohio 45401 -1047  
Toll Free - (800) 228-1698  
Come see us on the World Wide Web at <http://southpawenterprises.com>



**southpaw enterprises, inc.**<sup>®</sup>

Store these instructions along with the enclosed maintenance checklist in a safe place. You may also access them on our website.

## Instruction Sheet

# Ball Storage Rack 4 ft. 132001



Take time to familiarize yourself with the use and maintenance of this equipment before using. Please file this Instruction Sheet in an accessible location. The Instruction Sheet must be read and familiar to anyone who is using Southpaw Enterprises Equipment.

**IMPORTANT:** Please check equipment immediately for any damage that may have resulted during shipping. If any damage has occurred, please contact Southpaw Enterprises, Inc. immediately.

### MATERIALS LIST:

2 - End tubes with mounting bracket & elbow.

1 - Front tube

2 - 1/2-13 x 1" hex head bolts


2 - 1/2-13 clamp nuts

1 - Instruction Sheet

1 - Maintenance Checklist

**TOOLS NEEDED:** 3/4" wrench

**EASIEST TO ASSEMBLE WITH TWO PERSONS**

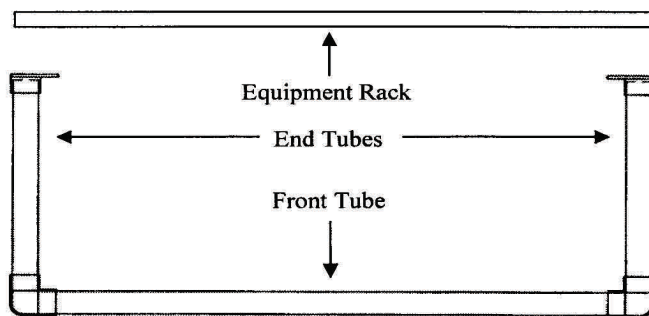

### TO ASSEMBLE:

- Assemble laying on a flat surface.
- Push one end of the front tube into the opening of the elbow on one of the end tubes. Make sure that the end of the straight piece goes all the way in until it hits the stop in the elbow.
- Lay the two assembled pieces on the flat surface so that when you put the other end tube on the opposite end of the front tube the two end tubes will be aligned with each other.
- With both end tubes laying on the flat surface, push the opposite end of the front tube into the opening of the elbow on the other end tube. It will help if someone holds one end of the front tube while the second end tube is being pushed onto the front tube. You may need to tap the elbow lightly to get it to go against the stop in the elbow.

### TO MOUNT TO EQUIPMENT RACK:

- Put a 1/2" x 1" bolt through the holes in the green mounting brackets from the front side of the bracket. One side of the clamp nut has a groove on each end with "teeth" in the grooves. Start the bolt into the clamp nut from this side. Start the bolts into the nuts just enough to keep the nuts on the bolts.
- With one person on each end of the ball rack, lift the rack in position against the equipment rack. Turn the clamp nuts horizontal so that they will go into the opening in the front of the equipment rack. Turn the bolt clockwise. The

clamp nut will turn and tighten the same way as the eye bolts in the equipment rack. Start the bolts in both ends of the rack. Using a 3/4" wrench, tighten both bolts securely.

**MAINTENANCE CHECKLIST:**

All of the following wear points should be checked on a monthly basis and recorded on the checklist enclosed.

- Check that bolts are tight. If loose bolts are found, tighten securely.
- Check for cracks in plastic tube. If cracks are found, discontinue use until repaired.

**CLEANING INSTRUCTIONS:**

- Check with your infectious disease department before using these procedures.
- Check for client allergies first.
- Wipe with a damp cloth using soap and water or disinfectant.

**Safety Precautions** - The safety of your clients is dependent on the appropriate choice of activity to match, yet challenge their physical abilities. Use appropriate spotting / safety techniques. In addition, the layout of your activity area, proper installation and maintenance of your equipment is critical. Southpaw equipment is not intended for recreational or outdoor use. Under no condition should this equipment be used without proper supervision.

**This sheet is for example only.** It is not meant to, in any way, replace local, county, state, or Federal standards. Be aware - it is your responsibility to find all pertinent safety information that pertains to your facility.



If you have any questions or comments, please call or write  
Southpaw Enterprises, Inc.  
P.O. Box 1047, Dayton, Ohio 45401 -1047  
Toll Free - (800) 228-1698  
Come see us on the World Wide Web at <http://southpawenterprises.com>